


light on your work

X-BOX - LED 4
4x320W 48V LED - 9M



TRIME
Lighting Tower Specialist



X-BOX-LED 4

4x320W 48V LED - 9M

Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-BOX LED has been created beginning from these characteristics. It is the best solution to your needs and guarantees 5000 sqm of illuminated area. 20 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.



8,5m



1030Kg



340°



5000 sqm



220(l) - 0,55(l/h)

- Multi-directionally adjustable and tiltable floodlights
- 7 sections hydraulic vertical tower 8,5 m, 340° rotatable
- Standard light sensor for machine power on and off
- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 22 units per truck
- Central lifting eye longitudinal and transversal forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine protection and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Fully bunded tank, 110%
- Certified wind stability up to 110 km/h
- 4 extendable & height adjustable stabilizers
- On board levels for guidance during stabilization

APPLICATIONS



Special events



Rural & hard to reach areas



Emergency response




Construction & work sites



Gas, oil & mining operations



Military applications



Illuminated area
5000 sqm



***Ease of transport
and handling***




**22
Units Per Truck**



***You can place 22 units on a
single vehicle thanks to one
of the compactest footprints
on the market.***

KEY BENEFITS

- ☑ **Low transport cost**
- ☑ **Low fuel consumption**
- ☑ **LED lamps**
mean **NO** replacement of
 - bulbs
 - lamp glass
 - ballast
 - capacitors**Reducing Call Out Costs**

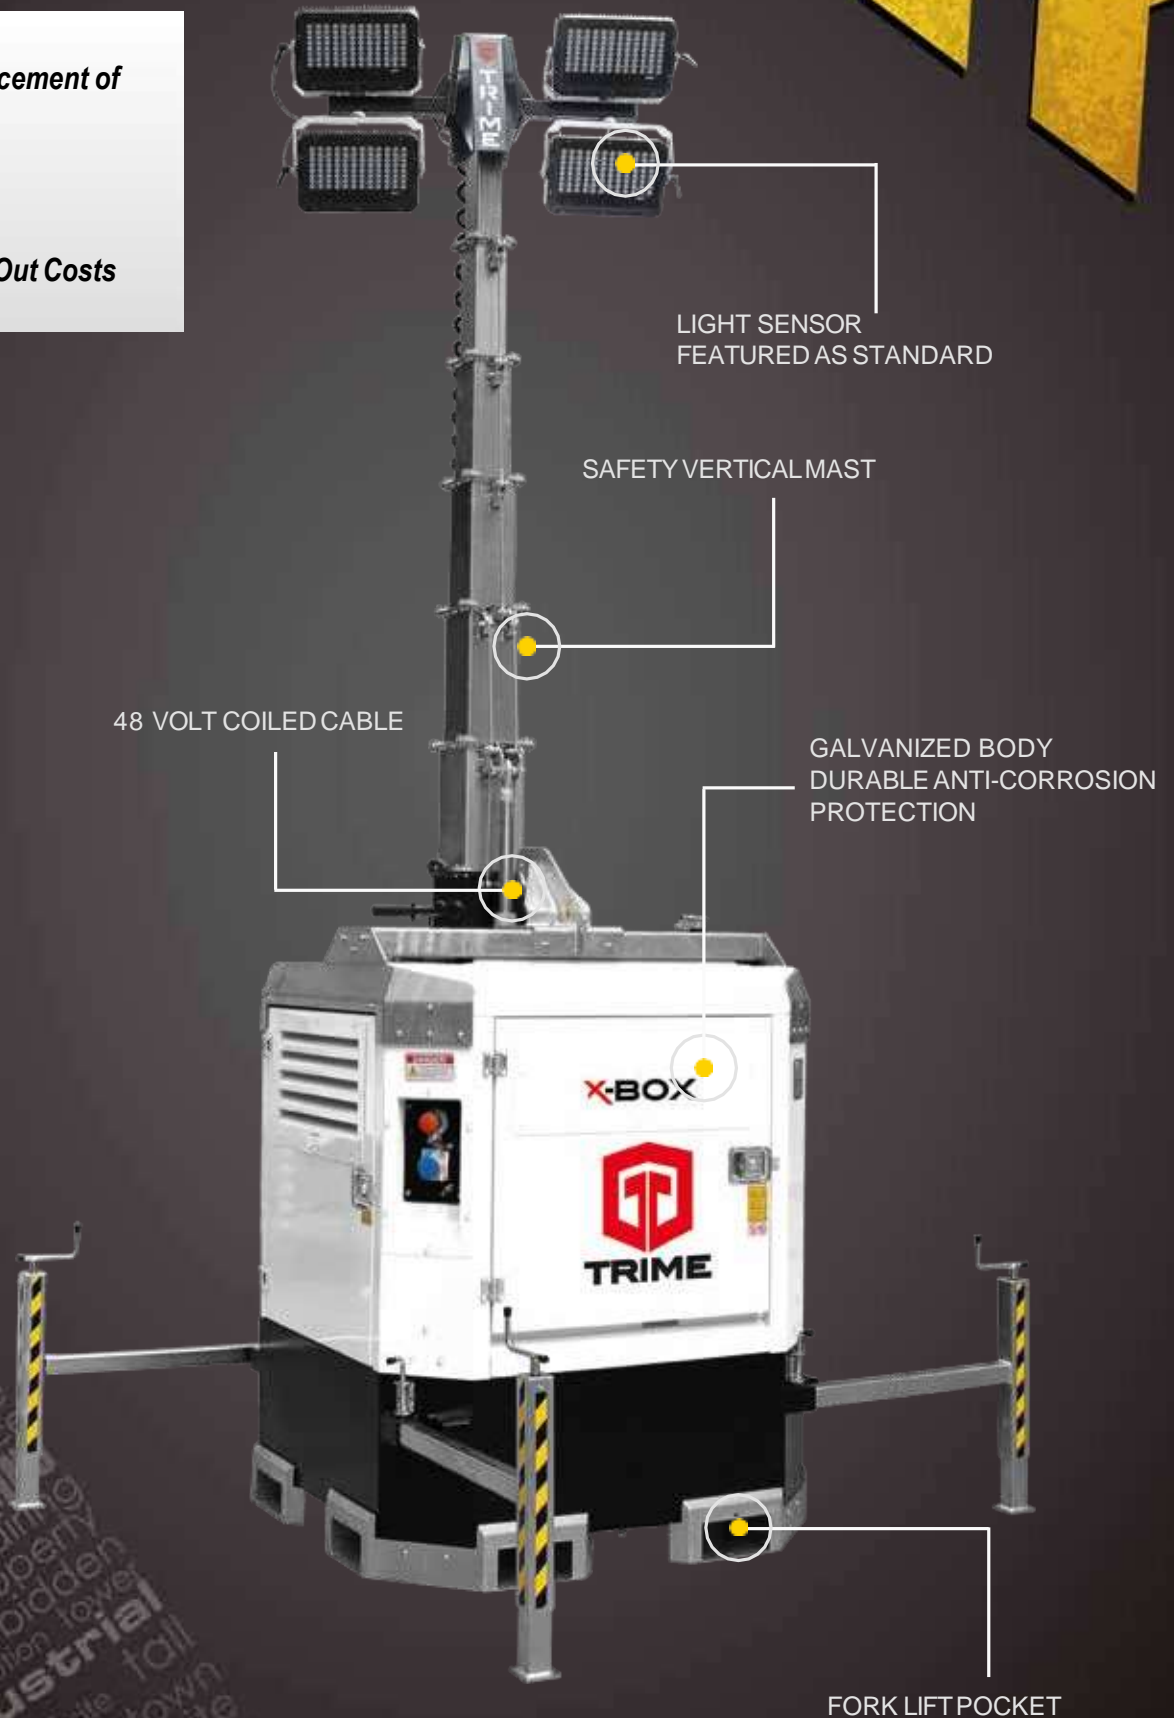

FORK LIFT POCKET

technical data

Dimensions & weight	
Dimensions min. (mm)	1200x1200x2560
Dimensions max. (mm)	2520x2520x8500
Total weight without fuel	1030 Kg

Features	
Rotation	340°
Floodlights	4x320W
Lamps	LED
Options	Timer


Alternator	
Model	Synchronous
Frequency (Hz)	50
Insulation class	H
Degree of protection	IP23
Single phase voltage	3,5 kVA - 230V
Auxiliary outlets	1 kVA

Engine	
Model	* Kubota Z482
Fuel	Diesel
r.p.m	1500
Tank capacity (l)	220
Consumption (l/h)	0,55
Running time (h)	400
Noise level (dBA) at 7m	65

* May vary based on stock availability. However, a primary equivalent brand will be used

Standard load delivery



22 sets



Units Per Truck

Illuminated area

5000 sqm

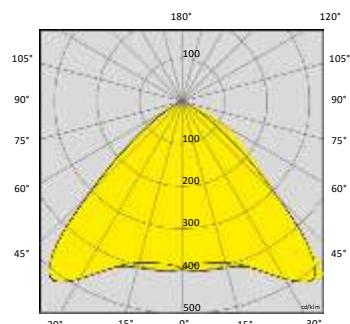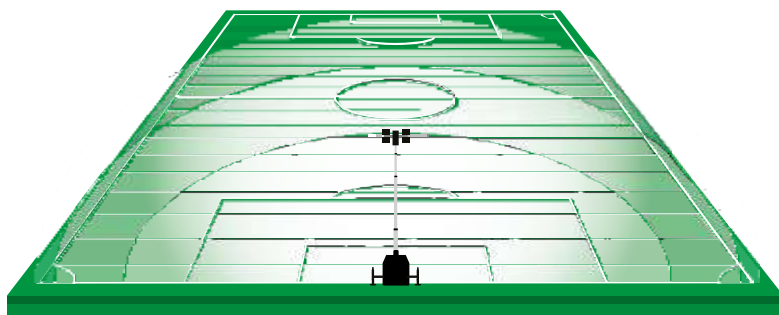

Lighting Tower Specialist

TRIME s.r.l.

Strada per Robecco, snc

20081 Cassinetta di Lugagnano (MI) - Italy

Authorized Distributor

PT. Federal Trada Utama

Komplek Ruko Grand Pasar Minggu,
No. 88K, JL.Raya Rawa Bambu No.88
Jakarta Selatan 12550.

Phone : (62-21) 27872979

Fax : (62-21) 27871255

Email : sales@federaltrada.co.id